



2D PANEL, Mesh Panel, 6/5/6 & 8/6/8

TECHNICAL SPECIFICATIONS

construction	6/5/6mm, 8/6/8mm wires
mesh pattern	50x200mm
posts	steel closed profile 60x40mm


ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1230mm, 1430mm, 1630mm, 1830mm, 2030mm
post height	2000mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

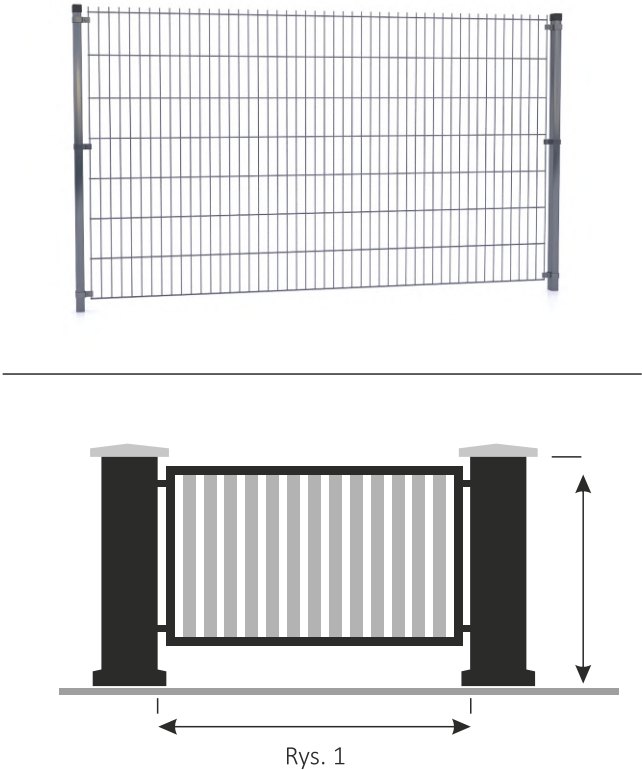

## WICKET GATE

### TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm
filling	2D Panel GUARD
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

### ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

### STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1400mm, 1600mm, 1800mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



### STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

### ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

## DOUBLE-LEAF GATE

### TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	2D Panel GUARD
posts	steel closed profile 80x80mm or 100x100mm and other

### ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

### STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1400mm, 1600mm, 1800mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



### STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

### ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

## SLIDING GATE

### TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	2D Panel GUARD
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



### ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

### STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

### STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

### ADDITIONAL OPTIONS

rail rack
automation drive
access control system


## FENCE FOUNDATION

### TECHNICAL SPECIFICATIONS

foundation	prefabricated concrete slab
connector	steel or concrete

### STANDARD DIMENSIONS

slab width	2500mm
slab height	2000mm, 2500mm, 3000mm
connector height	2000mm, 2500mm, 3000mm

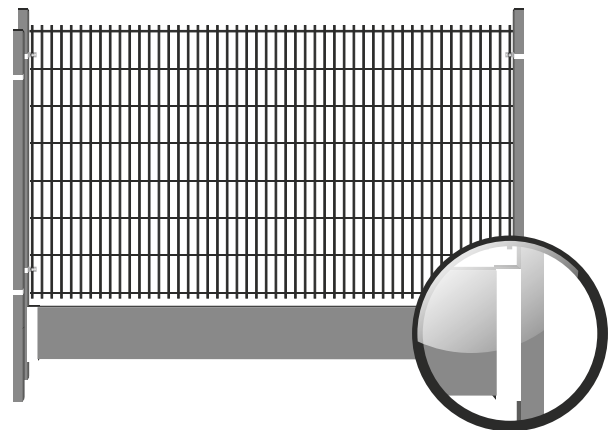

### COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 9005
