



3D PANEL, 'V' Mesh Panel

TECHNICAL SPECIFICATIONS

construction	vertical and horizontal wires: 3,5mm, 4mm, 5mm
mesh pattern	75x200mm , 50x200mm
posts	steel closed profile 60x40mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm, 2000mm
post height	2000mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

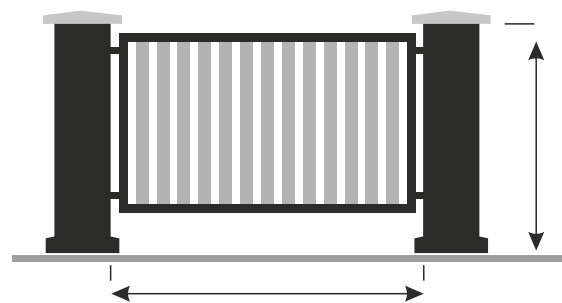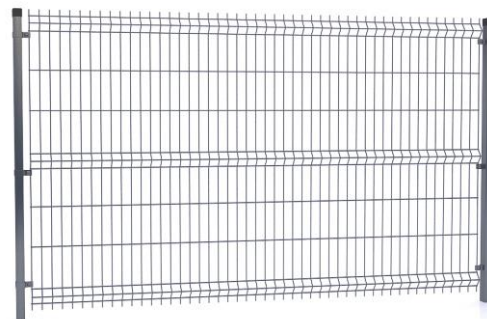

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm
filling	3D Panel SOLID
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	3D Panel SOLID
posts	steel closed profile 80x80mm or 100x100mm and other

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	3D Panel SOLID
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing	
DUPLIX system = hot dip galvanizing + powder coating RAL	
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005	
all RAL colours available	

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system


FENCE FOUNDATION

TECHNICAL SPECIFICATIONS

foundation	prefabricated concrete slab
connector	steel or concrete

STANDARD DIMENSIONS

slab width	2500mm
slab height	2000mm, 2500mm, 3000mm
connector height	2000mm, 2500mm, 3000mm

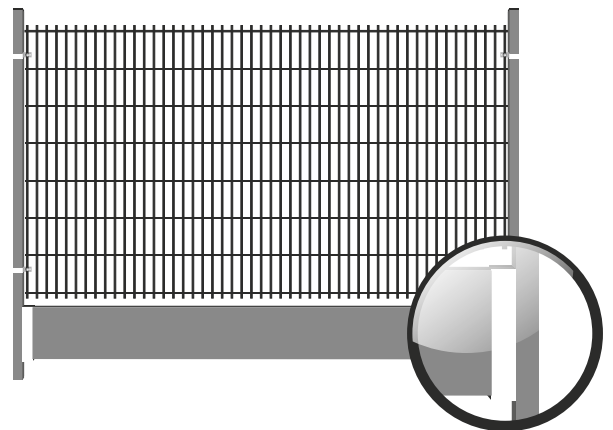

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 9005
