

GATES, FENCES

FOR HOME & FOR INDUSTRY





ProZAD

Office and exhibition

ul. Staszica 37
64-600 Oborniki
tel. + 48 61 697 46 93
kom. + 48 511 052 212
e-mail: biuro@pro-zad.com

MARKETING / SALES EUROPE

tel. +48 511 052 075
tel. + 353 851576305
e-mail: marketing@pro-zad.com

www.pro-zad.com

ABOUT US	1
SYSTEM KING	2
SYSTEM PRINCE	5
SYSTEM QUEEN	8
SYSTEM GOLD I	11
SYSTEM GOLD II	14
SYSTEM MASTER I	17
SYSTEM MASTER II	20
SYSTEM CHAMPION	23
SYSTEM VICTORY	26
SYSTEM TRIUMPH	29
SYSTEM SOLID	32
SYSTEM GUARD	35
SYSTEM SECURITY	38

We are established to provide businesses and retail customers attractive solutions in the field of fencing systems & pool technology, pedalos and garden pools manufacturing. We also realize individual orders related to the production of steel & fiberglass accessories.

ProZAD is a team of young, creative and experienced people, well versed in the field of techniques of production and trends prevailing in the manufacturing of steel & plastic products. We have two production halls with a total area of 3000 m² and a locksmith with an area of 500 m². During our work, we use not only skills, but also a sense of aesthetics, priceless while creating something unique. We like to take challenges and we can provide every customer's idea. Using only the best materials we care about the uncommon appearance of our products, their durability and resistance to external influences.

Why it is worth to cooperate with us?

- We guarantee the quality and innovation of our products,
- Rapid realization of orders,
- The creative team,
- Innovative solutions,
- Development into the international market.

TECHNOLOGY

LONGEVITY

ProZAD fencing system elements are rust-protected with top anticorrosive coating achieved by galvanising and powder painting. It is hot dip galvanising of a chemically cleaned construction that provides dozens of years of rust protection to our fencing system elements.

EFFICIENT PROTECTION

Galvanising is an efficient economically technique in terms of both production and maintenance. Galvanised fencing by ProZAD does not require surface maintenance for years. Rust-proofing no longer means expensive treatments as with traditional fencing. Galvanised steel may be recycled so it does not litter or burden the environment.

DUPLEX SYSTEM - Double Protection

Combined galvanised and varnish coatings in the DUPLEX system make ProZAD fencing serve considerably longer. In all weather conditions ProZAD fencing will look attractive. RAL colour palette application makes a selection of polyester coating colour easy.

PROOFED IN EVERY CONDITIONS

Galvanising by ProZAD complies with the European norm PN-EN ISO 1461 which guarantees proper quality of galvanised products. Galvanised coating is resistant to both high and low temperatures and UV radiation for best protection of steel surfaces.

GATES, FENCES

FOR HOME





FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 60x60mm or 80x80mm


ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

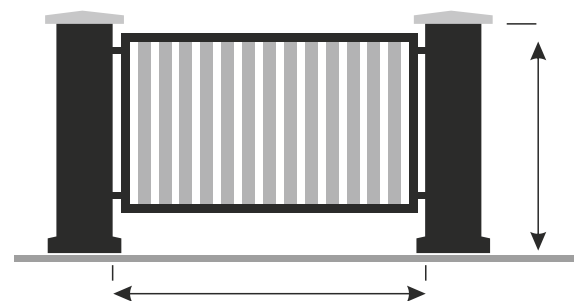

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 60x60mm or 80x80mm


ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

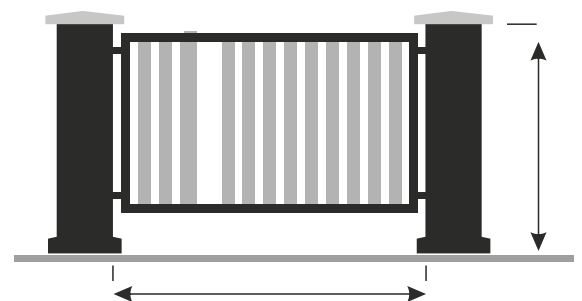

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






ADDITIONAL OPTIONS

rail rack
automation drive
access control system

above dimensions applied as per graphics [Rys. 1](#)

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 60x60mm or 80x80mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

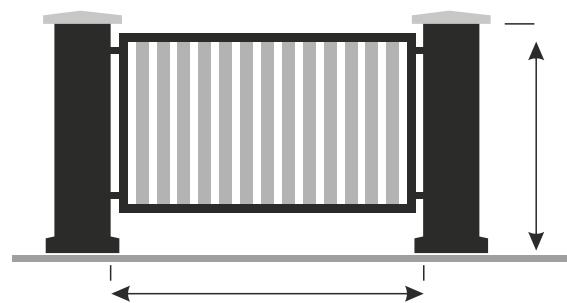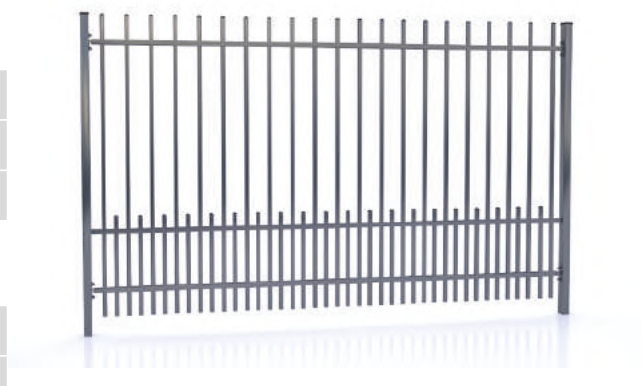

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm, steel flat bar 25x4mm
filling	steel closed profile 20x20mm with spacing 10cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 40x40mm
filling	steel closed profile 20x20mm with spacing 8cm
posts	steel closed profile 60x60mm or 80x80mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

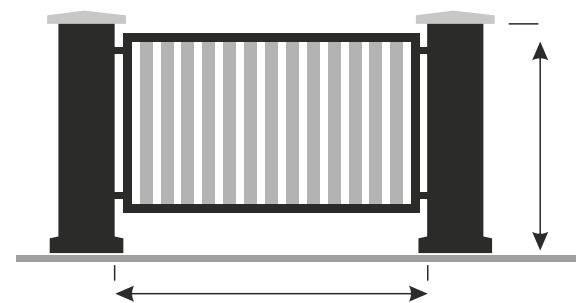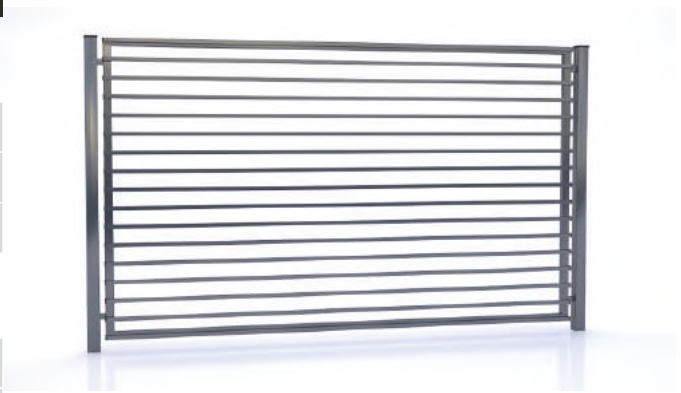

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 20x20mm with spacing 8cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 20x20mm with spacing 8cm
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 20x20mm with spacing 8cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 40x40mm
filling	steel closed profile 20x20mm with spacing 3cm
posts	steel closed profile 60x60mm or 80x80mm


ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

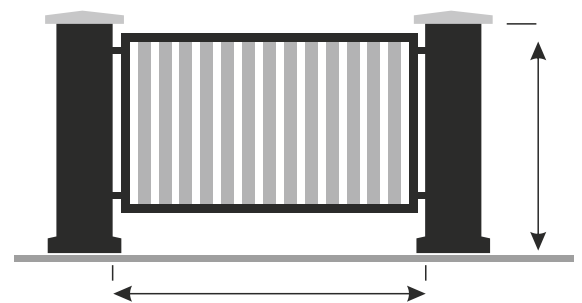

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 20x20mm with spacing 3cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 20x20mm with spacing 3cm
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle


ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 20x20mm with spacing 3cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm

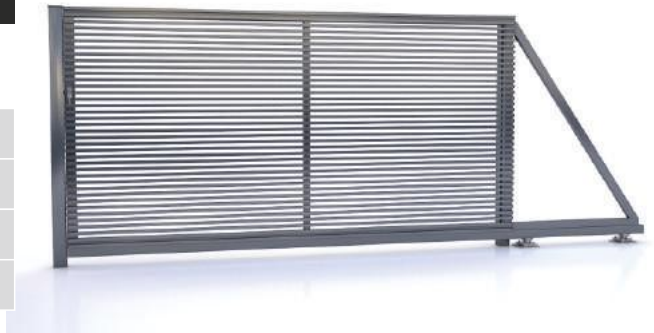

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	


ADDITIONAL OPTIONS

rail rack
automation drive
access control system

above dimensions applied as per graphics [Rys. 1](#)

COLOURS

Standard colours

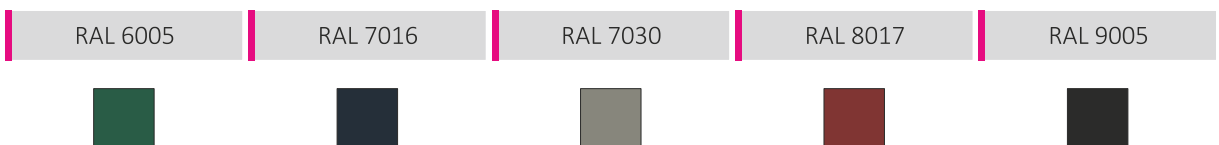



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 40x40mm
filling	steel closed profile 80x20mm with spacing 8cm
posts	steel closed profile 60x60mm or 80x80mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

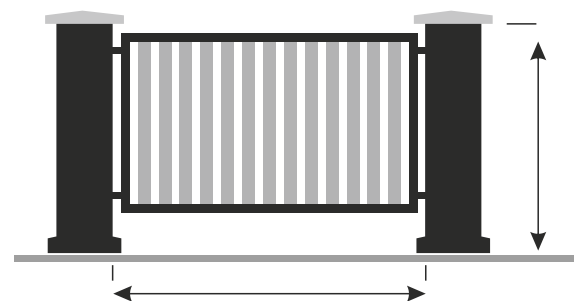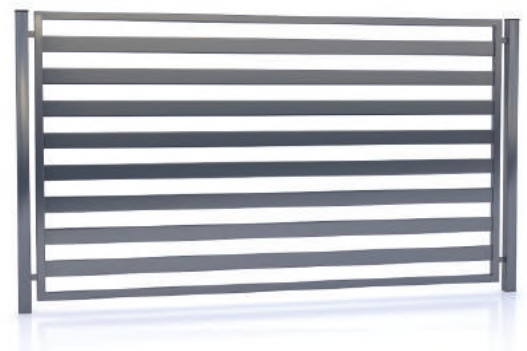

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 80x20mm with spacing 8cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 80x20mm with spacing 8cm
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle


ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 80x20mm with spacing 8cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm

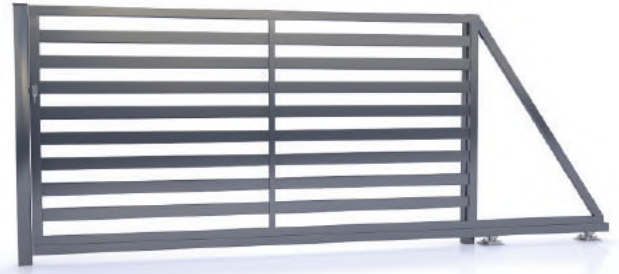

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 40x40mm
filling	steel closed profile 80x20mm with spacing 3cm
posts	steel closed profile 60x60mm or 80x80mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

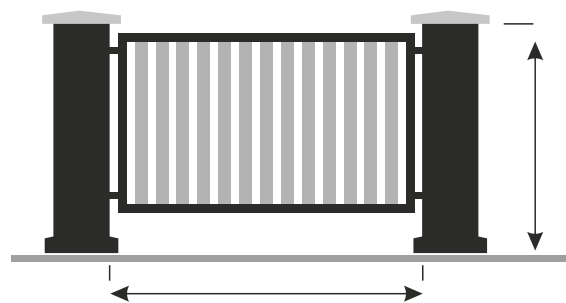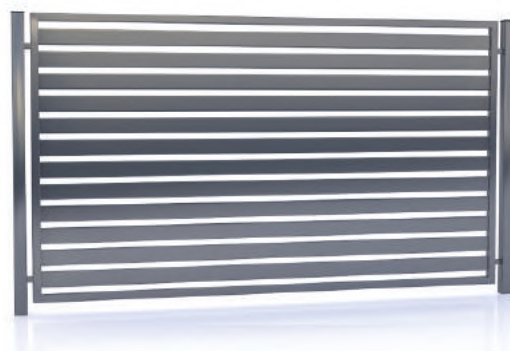

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 80x20mm with spacing 3cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 80x20mm with spacing 3cm
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle


ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 80x20mm with spacing 3cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm

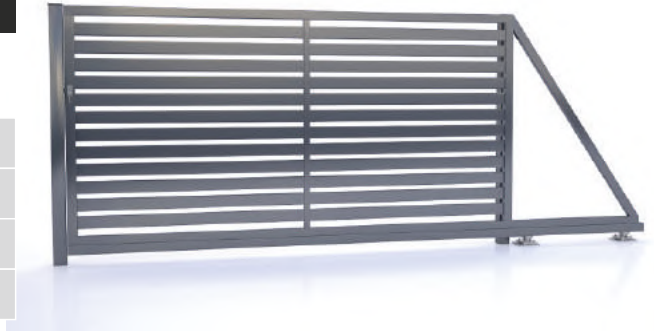

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






ADDITIONAL OPTIONS

rail rack
automation drive
access control system

above dimensions applied as per graphics [Rys. 1](#)

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel semi-closed profile 40x40mm
filling	fiberglass panel 240mm height with spacing 5cm
posts	steel closed profile 60x60mm and 80x80mm


ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

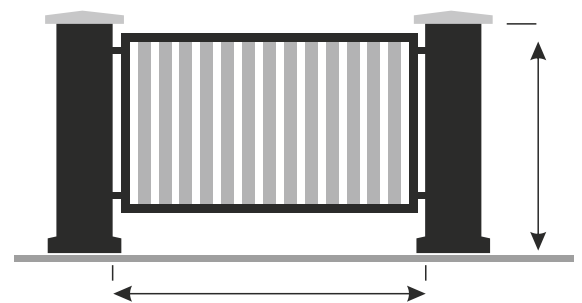

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel semi-closed profile 40x40mm & closed profile 80x20mm in the panel
filling	fiberglass panel 240mm height with spacing 5cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel semi-closed profile 40x40mm & closed profile 80x20mm in the panel
filling	fiberglass panel 240mm height with spacing 5cm
posts	closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel semi-closed profile 40x40mm & closed profile 80x20mm in the panel
filling	fiberglass panel 240mm height with spacing 5cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






above dimensions applied as per graphics *Rys. 1*

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm
filling	steel closed profile 80x20mm - shutter blind effect
posts	steel closed profile 60x60mm or 80x80mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

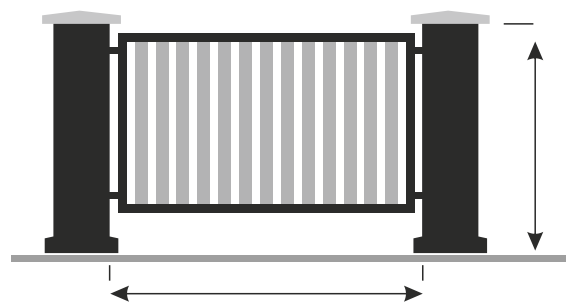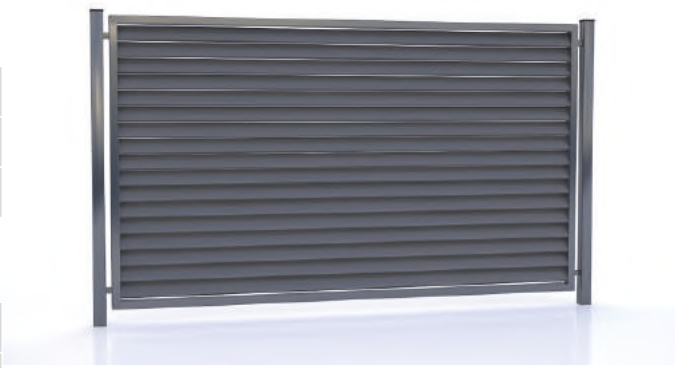

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm
filling	steel closed profile 80x20mm - shutter blind effect
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm
filling	steel closed profile 80x20mm - shutter blind effect
posts	steel closed profile 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)




STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

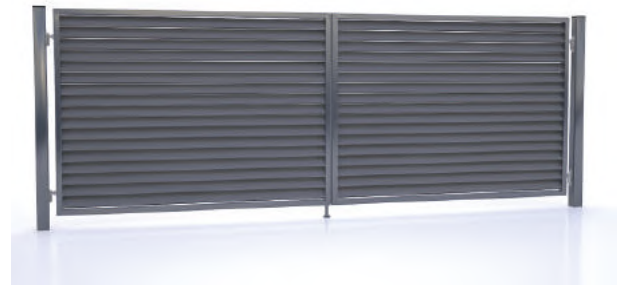

STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle


ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm
filling	steel closed profile 80x20mm - shutter blind effect
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm

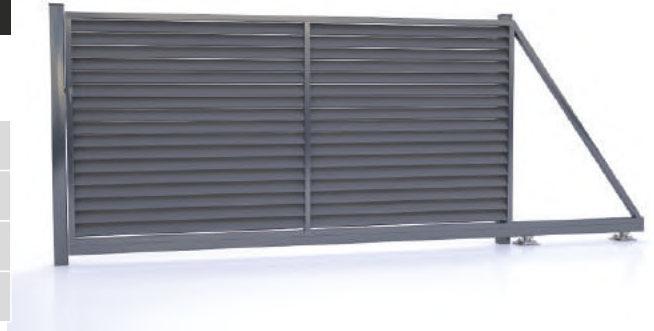

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLIX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and 20x20mm
filling	perforated steel sheet
posts	closed profile 60x60mm or 80x80mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

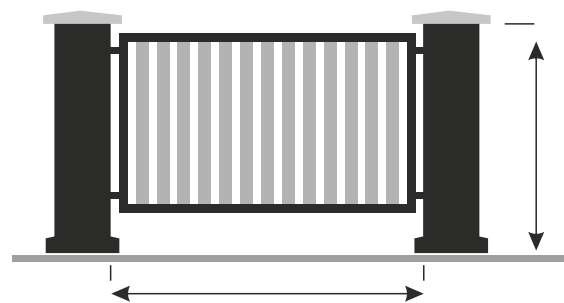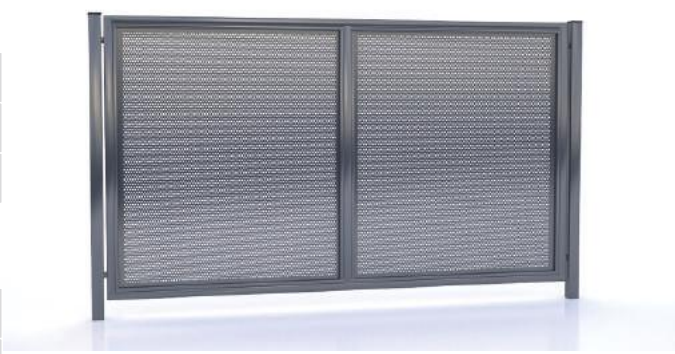

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and 20x20mm
filling	perforated steel sheet
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and 20x20mm
filling	perforated steel sheet
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)




STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

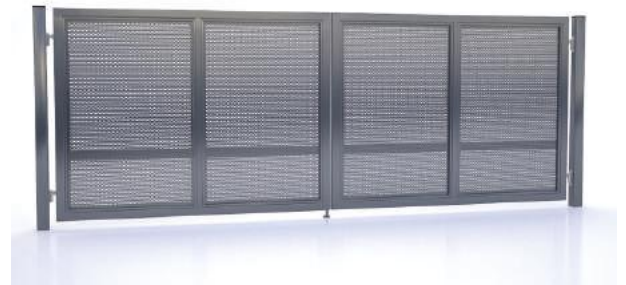

STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle


ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and 20x20mm
filling	perforated steel sheet
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm

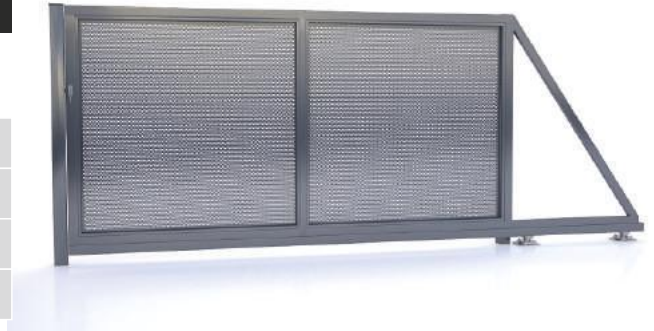

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm
gate height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	






above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 7030	RAL 8017	RAL 9005
				

GATES, FENCES FOR INDUSTRY





3D PANEL, 'V' Mesh Panel

TECHNICAL SPECIFICATIONS

construction	vertical and horizontal wires: 3,5mm, 4mm, 5mm
mesh pattern	75x200mm , 50x200mm
posts	steel closed profile 60x40mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm, 2000mm
post height	2000mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

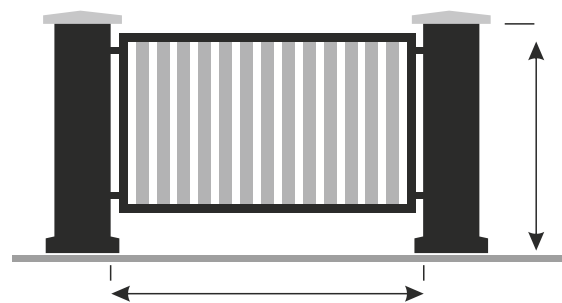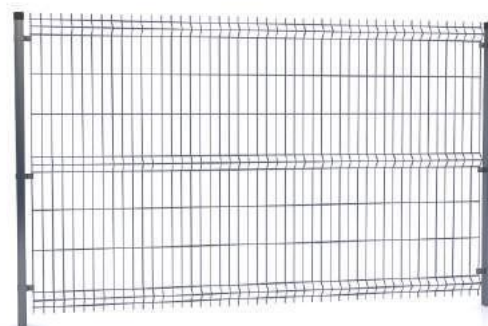

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm
filling	3D Panel SOLID
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	3D Panel SOLID
posts	steel closed profile 80x80mm or 100x100mm and other

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	3D Panel SOLID
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing	
DUPLIX system = hot dip galvanizing + powder coating RAL	
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005	
all RAL colours available	

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system


FENCE FOUNDATION

TECHNICAL SPECIFICATIONS

foundation	prefabricated concrete slab
connector	steel or concrete



STANDARD DIMENSIONS

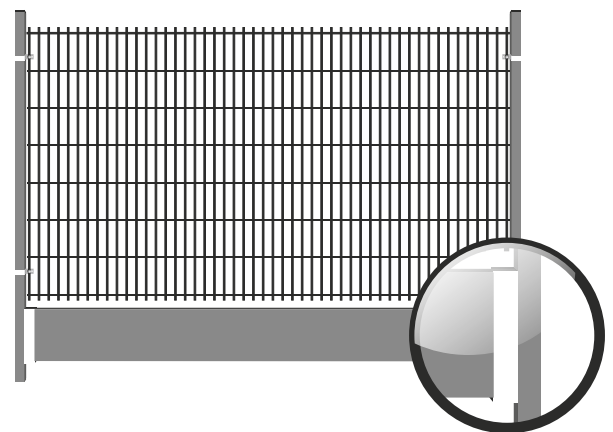slab width	2500mm
slab height	2000mm, 2500mm, 3000mm
connector height	2000mm, 2500mm, 3000mm



COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 9005
		



2D PANEL, Mesh Panel, 6/5/6 & 8/6/8

TECHNICAL SPECIFICATIONS

construction	6/5/6mm, 8/6/8mm wires
mesh pattern	50x200mm
posts	steel closed profile 60x40mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1230mm, 1430mm, 1630mm, 1830mm, 2030mm
post height	2000mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics **Rys. 1**

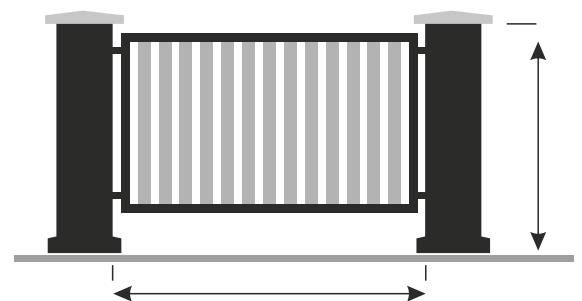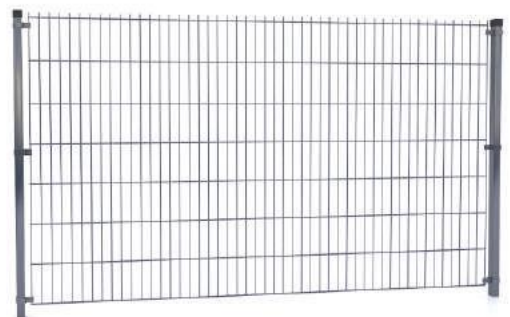

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm
filling	2D Panel GUARD
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1400mm, 1600mm, 1800mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	2D Panel GUARD
posts	steel closed profile 80x80mm or 100x100mm and other

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1400mm, 1600mm, 1800mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	
above dimensions applied as per graphics Rys. 1	



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	2D Panel GUARD
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing	
DUPLEX system = hot dip galvanizing + powder coating RAL	
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005	
all RAL colours available	

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system


FENCE FOUNDATION

TECHNICAL SPECIFICATIONS

foundation	prefabricated concrete slab
connector	steel or concrete




STANDARD DIMENSIONS

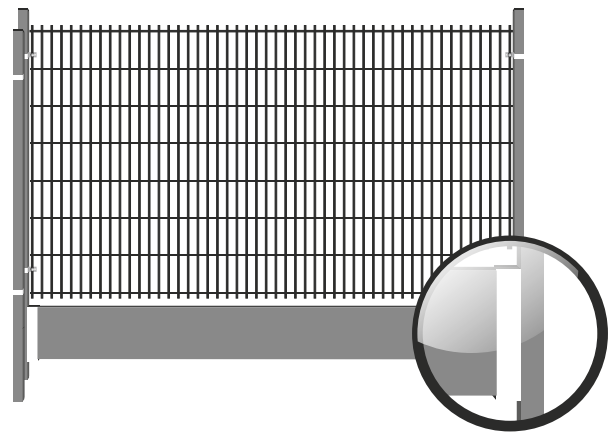slab width	2500mm
slab height	2000mm, 2500mm, 3000mm
connector height	2000mm, 2500mm, 3000mm



COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 9005
		



FENCE SEGMENT / PANEL

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 40x40mm
filling	steel closed profile 25x25mm with spacing 10cm
posts	steel closed profile 60x60mm or 80x80mm


ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

panel width	2500mm
panel height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

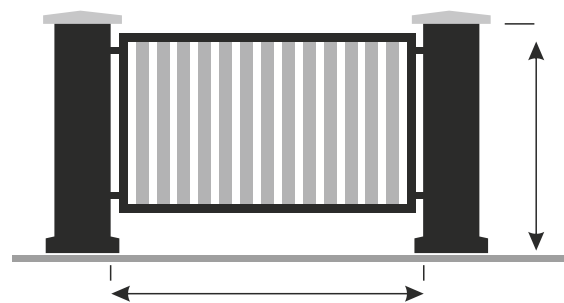

Rys. 1

WICKET GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm
filling	steel closed profile 25x25mm with spacing 10cm
posts	steel closed profile 60x60mm, 80x80mm or 100x100mm

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

wicket width	1100mm
wicket height	1200mm, 1500mm, 1700mm
post height	1800mm, 2200mm, 2400mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
handle
closing cassette

ADDITIONAL OPTIONS

cassette with electromagnet
intercom / video intercom
access control system

DOUBLE-LEAF GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm, 40x40mm and other
filling	steel closed profile 25x25mm with spacing 10cm
posts	steel closed profile 80x80mm or 100x100mm and other

ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm 2200mm 2400mm 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)



STANDARD EQUIPMENT

adjustable hinges
lock
padlock handle

ADDITIONAL OPTIONS

lock with handle
gate actuators
access control system

SLIDING GATE

TECHNICAL SPECIFICATIONS

frame construction	steel closed profile 60x40mm and 40x40mm and other
filling	steel closed profile 25x25mm with spacing 10cm
carrying rail	steel semi-closed profile 80x80mm
posts	steel closed profile 80x80mm or 100x100mm



ANTICORROSION PROTECTION

hot dip galvanizing
DUPLEX system = hot dip galvanizing + powder coating RAL
standard colours: RAL 6005, RAL 7016, RAL 7030, RAL 8017, RAL 9005
all RAL colours available

STANDARD EQUIPMENT

posts 80x80mm
drive and guiding system
hook lock

STANDARD DIMENSIONS

gate width	3000mm, 3500mm, 4000mm, 4500mm, 5000mm, 5500mm, 6000mm, 6500mm, 7000mm, 7500mm, 8000mm
gate height	1200mm, 1500mm, 1700mm, 2000mm
post height	1800mm, 2200mm, 2400mm, 2600mm
any dimensions available, make to size	

above dimensions applied as per graphics [Rys. 1](#)

ADDITIONAL OPTIONS

rail rack
automation drive
access control system

COLOURS

Standard colours

RAL 6005	RAL 7016	RAL 8017	RAL 9005
